

## Product specifications - Cabinet Wall Outdoor IP55



<b>Category:</b>	Cabinets
<b>Product:</b>	Cabinet Wall Outdoor IP55 (Wall or standing cabinet for indoor and sheltered outdoor use)
<b>Art.-No.:</b>	11.(...)




### Applications & Features

- ✓ Air Intake & Ventilation Protection
- ✓ Reinforced door
- ✓ Optional plinth available
- ✓ Hinged roof system
- ✓ Bottom with pre-assembled cable entries
- ✓ Wall or standing cabinet for indoor and sheltered outdoor use.

### General data

- Steel sheet housing with welded frame, completely pre-assembled
- Right and left metal-covered air inlets for passive ventilation
- Side walls not detachable
- Hinged roof; inner roof prepared for mounting Plug&Play fan unit Art.-No. 691656GR (cable not included; order separately, e.g. Art.-No. EK504.x)
- Bottom with PG glands: 1 × PG48, 2 × PG21 and 3 × Ø20 mm PVC blind grommets
- For depth 450 mm: inside 2 × 19" front-sided galvanized profile rails, with rack unit (U) numbering
- For depth 600 mm: inside 4 × 19" profile rails (2 front, 2 rear), galvanized, with rack unit (U) numbering
- Front door steel sheet reinforced; 3-point bar locking; lockable with profile half-cylinder acc. to DIN 18252 / EN1303
- Profile half-cylinder exchangeable by customer
- All internal cabinet parts earthed
- Max. load 100 kg
- Paint finish RAL7035, light grey
- Protection degree IP55
- Plinth available as option for use as standing cabinet
- Included accessories: 4 × wall mount angles, 2 × keys

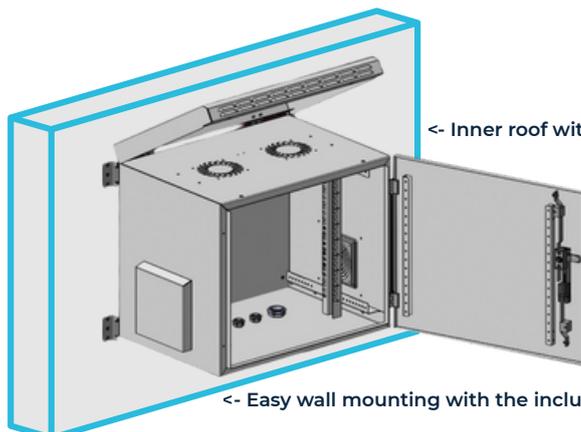

<- Inner roof with prepared openings for one or two single fans.

<- Easy wall mounting with the included brackets.

## Product specifications - Cabinet Wall Outdoor IP55



### Technical properties

<b>Cabinet Series 19" Wall Housing IP55</b>	19" Wall Housing IP55
<b>Degree of protection IP55</b>	IP55
<b>Demountable True</b>	True
<b>Material Steel</b>	Steel
<b>Model With permanent frame</b>	With permanent frame
<b>Modular spacing 482.6 mm (19 inch)</b>	482.6 mm (19 inch)
<b>Mounting level Front and rear</b>	Front and rear
<b>Number of cartons 1</b>	1
<b>Number of doors 1</b>	1
<b>Surface finishing Powder coating</b>	Powder coating
<b>Type of profile rail L-shaped</b>	L-shaped
<b>Type of ventilation Passive</b>	Passive
<b>With earthing True</b>	True
<b>With front door True</b>	True
<b>With roof plate True</b>	True
<b>With sidewall True</b>	True

## Product specifications - Cabinet Wall Outdoor IP55







### Item Overview

#### 19" Wall Housing IP55, Depth 450 mm:

Art.-No.	Description	U	Height	Width	Weight	Max. Load
11.2207010	19" Wall housing IP55, RAL7035, depth 450 mm	7U	410 mm	600 mm	26 kg	100 kg
11.2209010	19" Wall housing IP55, RAL7035, depth 450 mm	9U	500 mm	600 mm	29 kg	100 kg
11.2212010	19" Wall housing IP55, RAL7035, depth 450 mm	12U	630 mm	600 mm	32 kg	100 kg

### Technical Drawings - Depth 450 mm

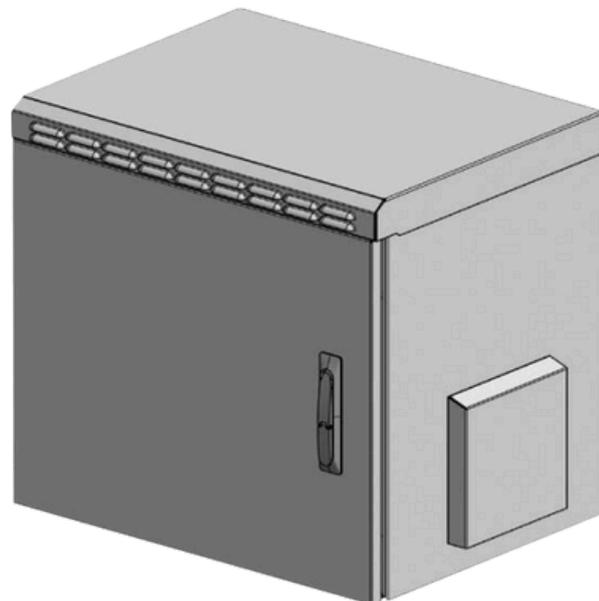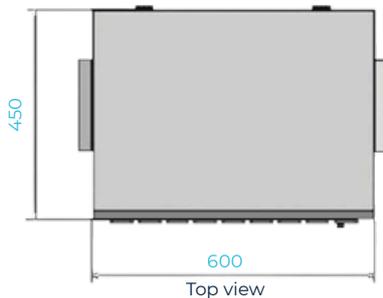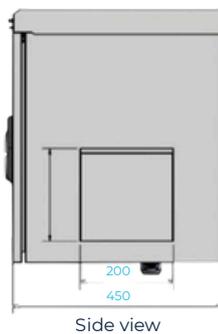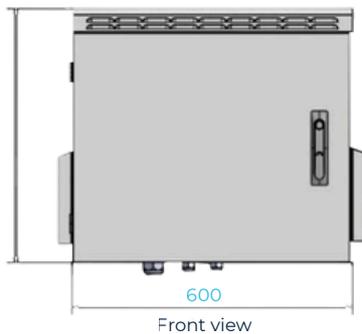

## Product specifications - Cabinet Wall Outdoor IP55



### Item Overview

#### 19" Wall Housing IP55, Depth 600 mm:

Art.-No.	Description	U	Height	Width	Weight	Max. Load
11.2507010	19" Wall housing IP55, RAL7035, depth 600 mm	7U	410 mm	600 mm	33 kg	100 kg
11.2509010	19" Wall housing IP55, RAL7035, depth 600 mm	9U	500 mm	600 mm	36 kg	100 kg
11.2512010	19" Wall housing IP55, RAL7035, depth 600 mm	12U	630 mm	600 mm	41 kg	100 kg
11.2516010	19" Wall housing IP55, RAL7035, depth 600 mm	16U	810 mm	600 mm	46 kg	100 kg
11.2520010	19" Wall housing IP55, RAL7035, depth 600 mm	20U	1000 mm	600 mm	52 kg	100 kg

#### Plinth for installing 19" wall housings IP55 as standing cabinets:

Art.-No.	Description	For Cabinet Width	For Cabinet Depth
13.5101105	100MM Height Plint For IP55 600*600 Cabinet	600 mm	600 mm

### Technical Drawings - Depth 600 mm

