


Product Specifications

Product family: Grayle

Category: USB Gen2.0 CM TO CM 0.5M-2M

Approvals  ROHS compliant

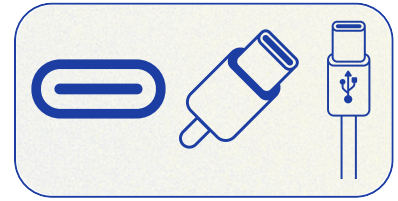


Specifications

- ✔ Support 480Mbps data
- ✔ Support 3A current
- ✔ Nickel plated connectors
- ✔ Conductive Resistance: 3 Ohms MAX
- ✔ Insulation Resistance: 5M Ohms MIN
- ✔ HI-POT : 300V DC/10ms
- ✔ 100% OPEN/SHORT TEST



Construction drawings

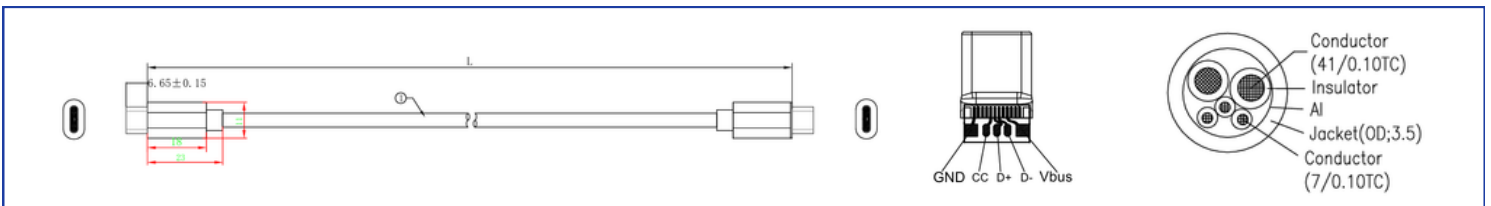

Model	Length (L)	TYPE C	Core Color	TYPE C
AC02-CM	0.5M 500±20	Vbus (A4, B4, A9, B9)	Red	Vbus (A4, B4, A9, B9)
AC02-CM	1.0M 1000±30	D- (A7)	White	D- (A7)
AC02-CM	1.5M 1500±30	D+ (A6)	Green	D+ (A6)
AC02-CM	2.0M 2000±30	CC (A5)	Blue	CC (A5)
AC02-CM	2.0M 2000±30	GND (A1, B1, A12, B12)	Drain	GND (A1, B1, A12, B12)