


## Product Specifications

Product family: Grayle

Category: HDMI Cable with Ethernet A to A type 2.1V - 8K 60Hz / 4K 120Hz

Approvals  ROHS compliant



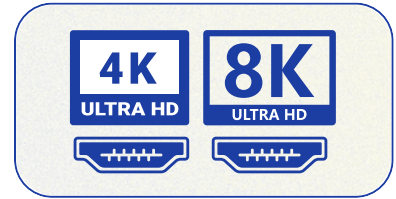


### Specifications

- ✔ Cap: HDMI a dust cover
- ✔ 100% OPEN/SHORT TEST
- ✔ INSULATION RESISTANCE : 10M Ohms MIN
- ✔ HI-POT : 300V DC/10ms
- ✔ Supports: 8K60Hz/4K120Hz.
- ✔ Braiding: Aluminum, triple shield
- ✔ Inner mold: LDPE transparent
- ✔ line clamp (1M - 5M): HDMI 30# line clamp
- ✔ line clamp (10M): HDMI 26# line clamp
- ✔ HDMI A/M: HDMI AM Gilded
- ✔ HDMI Plug: HDMI 24K Gold-plated | Bare Copper Conductor
- ✔ Wire Printing: Ultra High Speed HDMI | Cable with Ethernet



### Construction drawings

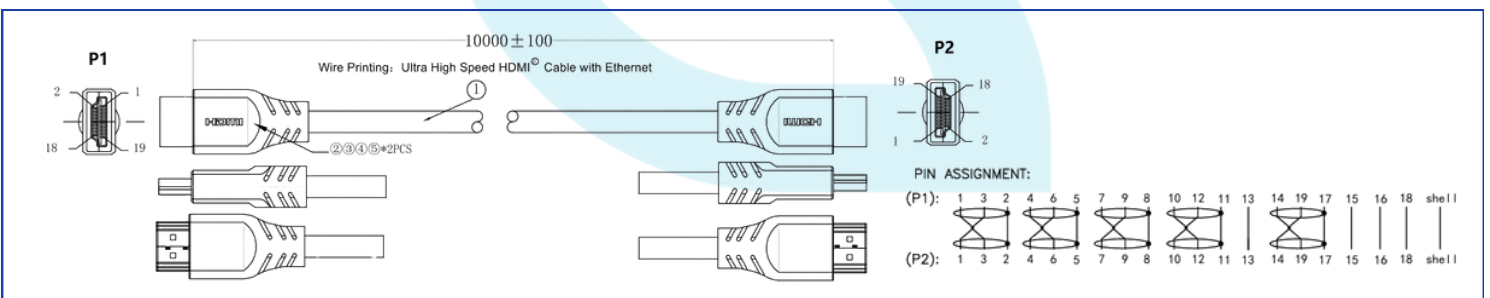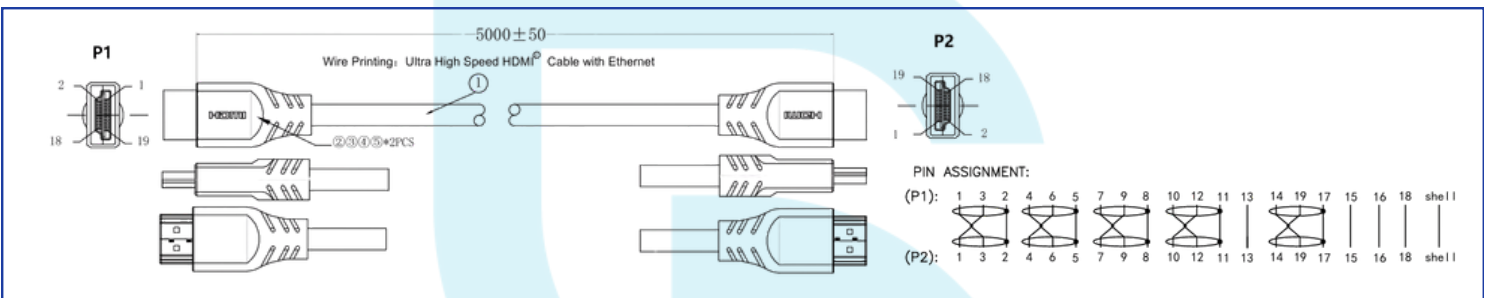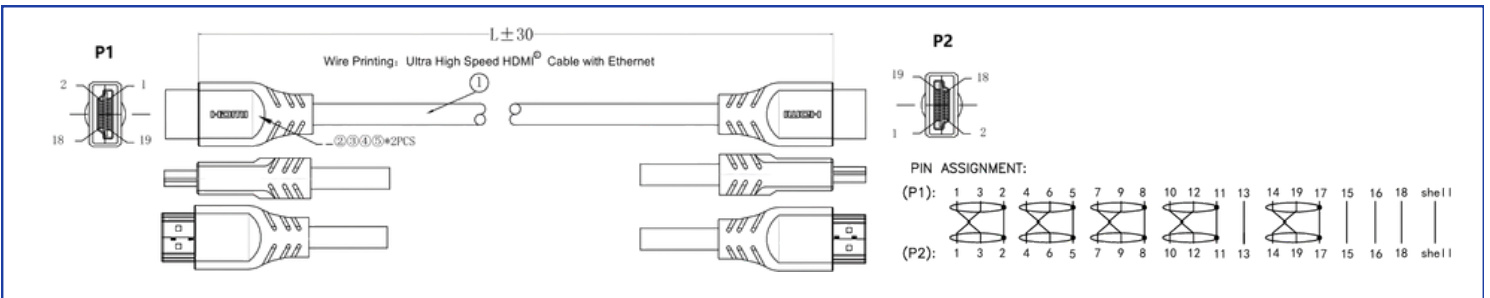

| Model                      | Length (L)      |
|----------------------------|-----------------|
| HDMI 2.1 version - OD6.1mm | 1M   1000±30    |
| HDMI 2.1 version - OD6.1mm | 2M   2000±30    |
| HDMI 2.1 version - OD6.1mm | 3M   3000±30    |
| HDMI 2.1 version - OD6.5mm | 5M   5000±50    |
| HDMI 2.1 version - OD7.5mm | 10M   10000±100 |

| Conductive resistance | Length (L)      |
|-----------------------|-----------------|
| 5 Ohms MAX            | 1M   1000±30    |
| 5 Ohms MAX            | 2M   2000±30    |
| 5 Ohms MAX            | 3M   3000±30    |
| 7 Ohms MAX            | 5M   5000±50    |
| 12 Ohms MAX           | 10M   10000±100 |